

MORE SPACE AFFORDED BY OPTIMISED HYDRAULICS

The ingenious, flow-optimised Geberit SuperTube technology creates a continuous column of air in the discharge pipe, meaning a parallel ventilation pipe installation is no longer required.

The pipelines with smaller dimensions, which cope entirely without ventilation pipes, require significantly smaller pipe ducts. What's more, the horizontal pipelines can be laid to a length of up to 6 metres without a slope to save on space. As a result, the Geberit SuperTube creates more usable living space.

SOPHISTICATED HYDRAULICS

EVERYTHING AN EFFICIENT DRAINAGE SYSTEM NEEDS

80%

GEBERIT SUPERTUBE

This technology facilitates a consistent discharge pipe with a single pipe dimension. There is no need for a ventilation pipe and, what's more, the horizontal pipeline can even be laid to a length of up to 6 metres without a slope.


With its maximum discharge capacity of 12 l/s and a consistent pipe diameter of d110, Geberit SuperTube offers a comparable performance to a conventional system with considerable reductions in space and material requirements.

TAKING THE GEBERIT PE SOVENT FITTING TO THE NEXT LEVEL

The Sovent fitting has already allowed Geberit to succeed in offering a space-saving solution for high-rise buildings by making it possible to do away with a parallel ventilation pipe. The Geberit SuperTube technology is now taking this concept one step further. Changes in direction have always required an additional ventilation pipe in the past, but the SuperTube has now made this surplus to requirements.


SPACE-SAVING INSTALLATION

Geberit SuperTube saves space in every direction. The ability to do without the additional ventilation pipe reduces spatial requirements in both the vertical stack and in horizontal pipelines, for example with an offset or collector pipe. What's more, there is also no need for a slope any more in horizontal pipelines of up to 6 metres in length. This makes it possible, for example, to install ceiling suspensions extremely close to the concrete ceiling at an offset.

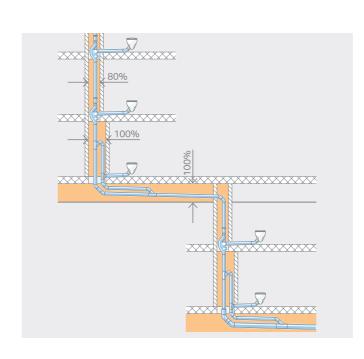

OPTIMISED SYSTEM WITH THE GEBERIT PE SOVENT FITTING

The solution featuring the Geberit Sovent does not require a parallel ventilation pipe. This achieves a maximum discharge capacity of 12 l/s with a pipe dimension of d110.



CONVENTIONAL SYSTEM

A conventional drainage system achieves a discharge capacity of 12.4 l/s with pipe dimensions of d160 and an additional d90 ventilation pipe.



COMPONENTS

FITTINGS THAT PUT A WHOLE NEW SPIN ON THINGS

The Geberit SuperTube technology is based on the perfect interplay between four system components. Three clever fittings coupled with the tried-and-tested Geberit PE discharge pipe with its high load-bearing capacity combine to create an innovative hydraulic solution that also brings clear additional benefits. These components are permanently welded to ensure a tight connection in the long term.



GEBERIT PE SOVENT FITTING D110

The optimised product geometry of the Geberit PE Sovent fitting guides the water into the stack and sets it in rotation, which causes it to press against the pipe wall. The resulting annular flow creates a stable, continuous column of air on the inside, which facilitates a discharge capacity of 12 l/s.



GEBERIT PE BOTTOMTURN BEND

With the Geberit PE BottomTurn bend, a change in direction causes the wall of water to break and the annular flow to become a layered flow without disrupting the column of air. This change significantly reduces impulse losses compared with conventional solutions.



GEBERIT PE BACKFLIP BEND

The twisted Geberit PE BackFlip bend causes the layered flow of water to swirl, which allows it to rotate through the vertical pipeline as it drains away in an annular flow. The inner air column in the subsequent stack is maintained.

GEBERIT SERVICE

HIGH AMBITIONS CALL FOR A STRONG PARTNER

Finding cost-effective and reliable drainage systems for high-rise buildings often presents a challenge for building owners, sanitary engineers and plumbers alike. With its consistent research into hydraulics and its own, in-house product development, Geberit is raising the bar not only on a technical level, but also when it comes to service.

Partnership and reliability are core values that our customers around the world can expect from us. Whether you are looking for sound initial advice, planning support, help with invitations to tender, or building site support, the Geberit team is always by your side when you need it.

ADVICE & PLANNING

QUOTE CALCULATION

PROJECT MANAGEMENT

1 GOOD ADVICE & PLANNING


- Support with checking the possible applications of Geberit SuperTube
- Complete planning service including construction plans
- Geberit Tool for SuperTube Planning
- Material planning
- Provision of BIM data for Autodesk® Revit® and CAD data www.geberit.si/bim

2 EASY, RELIABLE CALCULATIONS

- Support with preparing a quotation
- Creation of a material list
- Creation of complete packages (pipelines, fittings, tools) for Geberit SuperTube

3 ON SITE SUPPORT

- Building site training for plumbers
- On-site inspections by Geberit specialists
- Support with change planning
- Final project acceptance

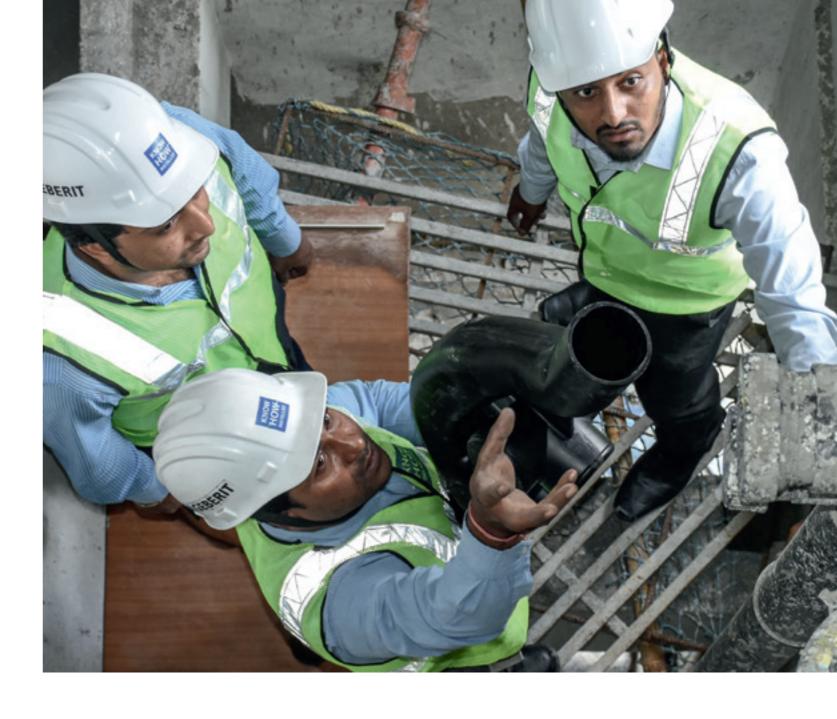

GEBERIT TOOL FOR SUPERTUBE PLANNING

Straightforward planning thanks to the dimensioning tool. The web tool guides you through the process of planning a one-dimensional discharge pipe step by step. The values and information obtained can then be collated and downloaded as a PDF file.




8

GEBERIT HYDRAULIC COMPETENCE

RELIABLE BUILDING DRAINAGE IS NO ACCIDENT

Contemporary buildings are setting ever-higher requirements, including for drainage systems. Large quantities of rainwater and waste water have to be drained safely and reliably over long distances. The hydraulics specialists at Geberit develop and optimise product solutions and systems that can take on this task effortlessly. Our many years of experience in flow engineering, comprehensive physical know-how, and unparalleled simulation and testing opportunities also establish firm foundations in this regard.



SIMULATIONS AND TESTS

The Geberit researchers start by using computational fluid dynamics (CFD) to establish potential development variations on a virtual basis in order to filter out optimal solutions for further development within the laboratory environment. The in-house drainage tower, which has been part of the test laboratory for over 50 years, then offers the opportunity to subject the new developments to all relevant hydraulic tests under real-life conditions in a subsequent step. It is only once the prototypes have successfully confirmed the simulation results in intensive laboratory tests that additional practical tests are conducted to develop them further for market.

TAKING DEVELOPMENT TO THE NEXT LEVEL

With the Geberit PE Sovent fitting, which was first developed in Switzerland back in 1959, it was finally possible to create a drainage system that did not require an additional ventilation pipe. Countless private and national test installations throughout the world verified the capabilities of this revolutionary innovation before the product eventually made its way onto the market in 1970. Over the course of the continuous product development process, the familiar Geberit PE Sovent fitting with d110 dimensions was later relaunched on the market in a flow-optimised version. The basic physical concept behind this was constantly being redeveloped until the new Geberit PE BottomTurn bend and Geberit PE BackFlip bend fittings were finally created. These have now also made their way onto the market in the form of an optimal combination known as SuperTube technology.



COMPREHENSIVE PRODUCT TESTS

The existing drainage tower was expanded considerably as part of the development process for the SuperTube technology in a bid to simulate real high-rise conditions in practice and create an offset at a length of up to 6 metres. The structures above the roof were designed to represent floors above the offset. The successful results – as well as all of the installations including the comprehensive measuring technology – were documented and confirmed by an external, accredited testing facility once the development process was complete.



10 11

LOBBY 33, GUADALAJARA, MEXICO

INNOVATIVE TECHNOLOGY FOR GREATER ENVIRONMENTAL AWARENESS



"Space savings are always a crucial consideration. As far as investors are concerned, maximising the usable selling space is paramount. Cost-effectiveness also has a role to play, although this is not always clear when comparing the material costs of different systems."

Aldo Reyes Artexa in Mexico

PROJECT OVERVIEW

- Project Developer: Numel Constructora Integral
- Architect: Carlos Santoscoy
- Owner: Promodesa Habitat
- Plumber: Servi
- Height: 140 mFloors: 30
- Completion: 2018


THE CHALLENGE

The Lobby 33 architects were keen to establish a better balance between architecture and environmental friendliness through the use of innovative technologies. The concept behind the building was to create a sustainable oasis that would reduce waste and improve the $\rm CO_2$ balance. Its use of the latest technologies is also contributing to a change in architectural mindset within Mexico


THE SOLUTION

The Geberit PE Sovent fitting won out as the favourite solution for the building drainage systems, as it required no additional ventilation pipe and allowed for the use of smaller pipeline dimensions. This resulted in significant space savings as well as a more straightforward overall installation process, which not only saved time for all involved but also reduced the final costs for the customer. An equally positive factor with regard to timing was the possibility to prefabricate the parts in the Geberit PE pipe system.

Both the high quality standards and the time savings afforded by the Geberit PE Sovent fittings allowed the architects to achieve their objectives.



Planning with conventional ventilation system



Planning with Geberit Sovent



GINDI TLV TOWERS, TEL AVIV, ISRAEL

A HIGH-RISE ISLAND AT THE HEART OF THE CITY



"Space is a crucial aspect of any project. Here, we were able to reduce the size of the pipe duct by using the Geberit PE Sovent fitting. We actually achieved an average saving of 0.06 m² per pipe, which – at a total of 45 m² – amounted to the size of a small apartment."

Zvi Pollak Leading Consultant



of Geberit products, having relied on Architect: MYS Architects / Yasky Mor them for many years, the decision to use Geberit PE Sovent fittings was an easy one. This meant the pipe diameter for the drainage system could be reduced from 160 mm to 110 mm, thereby saving


valuable space.


The regular visits from the Geberit team during the construction phase were also very well received and proved invaluable to the progress of the project.


RESULTS

- Planning support from Geberit
- Reduction of stacks from 71 to 36
- Time savings due to prefabrication
- 40% reduction in costs









Final plan with Geberit Sovent

PROJECT OVERVIEW (ALL FOUR TO-WERS)

- Project developer: Gindi Developers
- Sivan
- Owner: Gindi Developers
- Plumber: Danya Cebus Ltd. / Y. Adiv
- Height: 160-180 m
- Floors: 46-50
- Completion: 2023

THE CHALLENGE

GINDI TLV is a huge new residential and lifestyle complex at the heart of Tel Aviv. The project called for the most cutting-edge technology along with the objective to save as much space as possible, as this comes at an expensive premium in Tel Aviv.

Geberit prodaja d.o.o. Bezena 55 a

2342 Ruše Slovenija

www.geberit.al